

Automatic centrifugal multistage pump with variable speed for water supply

Applications

Automatic pumping of clean water for domestic, industrial, agricultural and gardening purposes.
Silent.
Self-priming up to 2m.
Adjustable working pressure Range of use from 1,5 to 3,5 bar.

Materials

Pump body and impellers in AISI 304.
Pump shaft in AISI 431.
Diffusers in technopolymer.
Mechanical seal.
Motor casing in aluminum.
O-rings in NBR/EPDM.

Equipment

Built-in check valve.
Built-in pressure sensor.
2m of cable with plug type F.
Kit Press and pressure gauge included.
Dry-run protection.
Automatic reset function.

Motor

Asynchronous 2 poles.
IPX5 protection.
Class F insulation.
Built-in thermal protection.
Continuous operation.

Range of use

Maximum water temperature 40 °C.

Operation

Variable speed to maintain the constant pressure and flow that apartment, building or installation demand at every moment.




Complete set	Plug&Play	Ultra-quiet	Constant pressure	Maximum hydraulic comfort	Up to 5 taps simultaneously

Features table

Model	I [A]	P1 [kW]	P2		c [µF]	l/min	5	10	30	45	50	Code
	1~230V	1~	[kW]	[HP]		m³/h	0,3	0,6	1,8	2,7	3	
Tecnoplus 15 4	3,6	0,75	0,55	0,75	12	mwc	36	36	30	21	16,5	131059

Performance curve

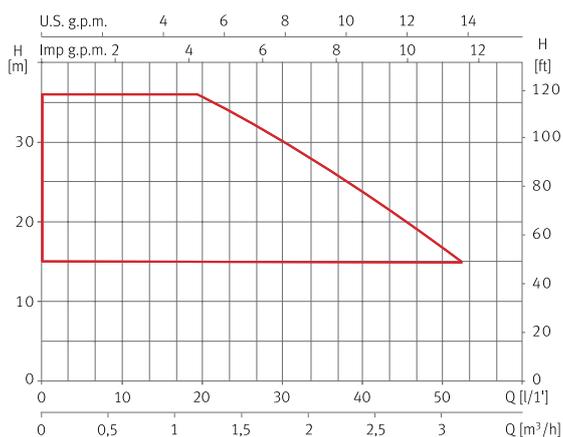

Dimension and weight

Model	A	B	C	D	E	F	G	H	J	K	L	M	Kg
Tecnoplus 15 4	439	108	261	200	216	241	254	88	Ø243	196	1"	1"	10,5

